

REFLECTED CEILING LEGEND

LIGHTING: (SEE ELECTRICAL)

- NEW LIGHTS
- RELOCATED LIGHTS
- EXISTING LIGHTS
- EXISTING LIGHTS TO BE REMOVED
- NEW NIGHT LIGHTS
- NEW LIGHTS WITH TUBE SHIELDS
- EXISTING COOLER/FREEZER LIGHTS, SEE ELECTRICAL DRWS. FOR REPLACEMENTS
- NEW/RELOCATED COOLER/FREEZER LIGHTS
- EXISTING EXIT LIGHTS
- NEW/RELOCATED EXIT LIGHTS
- EXISTING EMERGENCY LIGHTS
- NEW EMERGENCY LIGHTS
- EXISTING EMERGENCY EXIT LIGHT

HVAC & VENTILATION: (SEE MECHANICAL)

- EXISTING DIFFUSER
- NEW/RELOCATED DIFFUSER
- EXISTING RETURN
- NEW/RELOCATED RETURN
- EXISTING EXHAUST FAN
- NEW/RELOCATED EXHAUST FAN OR TRANSFER FAN
- EXISTING EVAPORATOR
- NEW/RELOCATED EVAPORATOR
- EXISTING CEILING FANS

SPRINKLER:


- EXISTING SPRINKLER HEAD
- NEW OR RELOCATED SPRINKLER HEAD

REFER TO SHEET A6.01 FOR FINISH MATERIALS LEGEND

CEILING TYPES:


- CEILING HEIGHT
- EXISTING SUSPENDED CEILING
- NEW SUSPENDED CEILING
- GYPSUM BOARD OR EPS, PAINTED
- EXPOSED STRUCTURE
- FIRE RETARDANT PLYWOOD OR PREFAB CEILING
- EXTERIOR VINYL SOFFIT

- GENERAL NOTES:**
- CEILING HEIGHTS FOR ALL NEW CEILINGS SHALL BE AS NOTED IN ALL ROOMS.
 - CEILING GRID TO BE 2'-0"x4'-0" T-BARS LAID OUT FROM CENTER LINES IN BOTH DIRECTIONS. LAY OUT SO THAT NO TILE LESS THAN HALF SIZE WILL BE USED, EXCEPT AS NOTED. MAIN RUNNERS TO BE 4'-0" ON CENTER WITH MAIN RUNNERS AT ALL LIGHT FIXTURES.
 - GENERAL CONTRACTOR TO COORDINATE THE LOCATION OF SPRINKLER HEADS, LIGHT FIXTURES AND DIFFUSERS IN ALL AREAS WITH ASSOCIATIVE SUB-CONTRACTORS.
 - PREP AREA CEILING TILE TO BE A F.R.P. LINED, FOAM PANEL BY HUDG PRODUCTS INC., 2508 S. GRAND AVE. E., SPRINGFIELD, ILLINOIS 62797. PHONE: 1-800-826-4132
 - RELOCATE EXISTING LIGHT FIXTURES, AS NOTED, UNLESS DAMAGED. COORDINATE WITH FOOD LION CONSTRUCTION MANAGER.
 - THE CONTRACTOR SHALL FURNISH TWO EXTRA BOXES OF CEILING TILE FOR EVERY NEW TYPE OF TILE USED IN THE STORE. TO BE LEFT AT THE STORE FOR FUTURE USE.
 - IF APPLICABLE, THE REMOVAL OF EXISTING CEILING TILE IS TO BE DONE BEFORE REMOVAL OF RACK OVEN OR HOB. NEW RACK OVEN OR HOB TO BE INSTALLED BEFORE NEW CEILING IS INSTALLED IN THIS AREA. COORDINATE WITH THE FOOD LION CONSTRUCTION MANAGER.
 - THE GENERAL CONTRACTOR SHALL VERIFY THE EXISTING LIGHTING LAYOUT. ANY DISCREPANCIES TO THE LAYOUT SHOWN SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE FOOD LION CONSTRUCTION MANAGER.
 - GENERAL CONTRACTOR SHALL REPAIR THE CEILING GRID & INSTALL NEW TILE WHERE LIGHT FIXTURES HAVE BEEN REMOVED. COORDINATE W/ FOOD LION CONSTRUCTION MANAGER.
 - ALL REPLACED CEILING GRID AND TILE SHALL MATCH EXISTING CEILING IN MATERIAL, COLOR, HEIGHT, AND LOCATION.
 - NEW CEILINGS IN SALES & SUPPORT AREAS TO BE 2x4 ARMSTRONG HUMAGUARD PLUS TILE IN PRELUDE XL GRID - SEE SPECIFICATIONS.
 - NEW CEILINGS IN PREP AREAS AND WET LOCATIONS TO BE 2x4 ARMSTRONG VINYL CLAD TILE IN PRELUDE XL GRID - SEE SPECIFICATIONS.

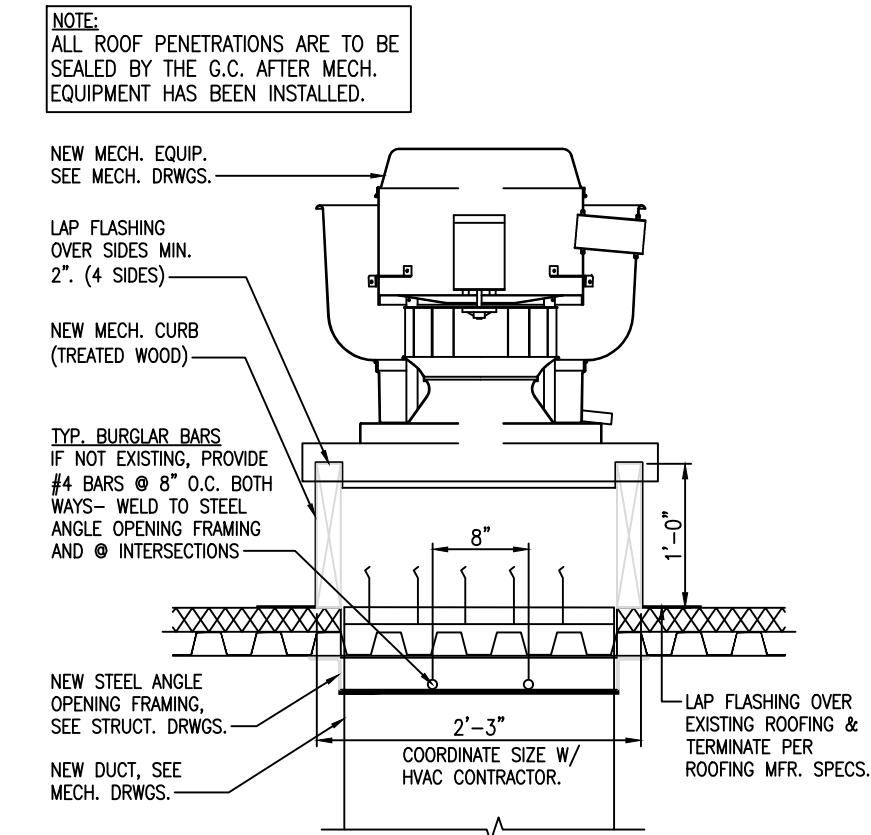

Architecture
Interior Design
Land Planning
Project Management

Professional Seals

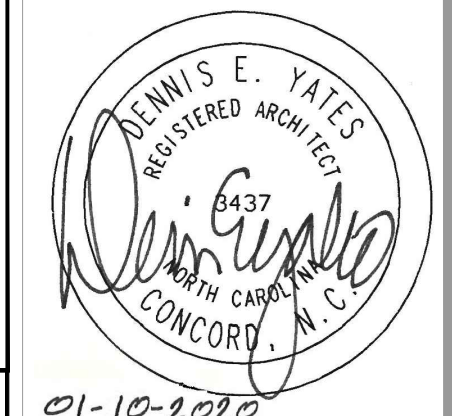

Interior Alteration For:



2110 Executive Drive, Salisbury, NC 28145 / Ph: 704.633.8250

1555 E. UNION STREET
MORGANTON, NC 28655

Store No. **2250**

OWNERSHIP OF INSTRUMENTS OF SERVICE:

All reports, specifications, plans, computer files, field data, notes, and other documents and instruments of service shall remain the property of the Design Professional. The Design Professional shall retain all common law, statutory and other reserved rights, including the copyright therein.

This drawing is the property of Yates - Chelberg - Hughes Architects and is not to be reproduced or copied in whole or any part. It is not to be used on any other project and is to be returned upon request.

© Copyright 2019

Project No.: **2250FLTMHP20**

File Name: **2250 A1.04.00.dwg**

Date: **01-10-2020**

Revisions:

REFLECTED
CEILING PLAN

Architectural
A1.04
YCH Commission Number

19029.00

7035 Northwinds Dr NW
Concord, NC 28027

704 . 788 . 2000

ycharch.com