

ENVIRONMENTAL CONTROL PANEL CONDUIT SYSTEM

◇ = SENSOR (TEMP/HUMIDITY) HANDY BOX MTD.


1. ENTIRE CONDUIT SYSTEM FOR ENVIRONMENTAL CONTROL PANEL SHALL BE SUPPLIED BY THE ELECTRICAL CONTRACTOR (WITH PULL STRINGS). ALL WIRING AND TERMINATIONS FOR THE ENVIRONMENTAL CONTROL PANEL SHALL BE COMPLETED BY THE MECHANICAL CONTRACTOR. ALL WIRING AND TERMINATIONS FOR THE ENERGY MANAGEMENT PANEL SHALL BE COMPLETED BY THE ELECTRICAL CONTRACTOR.
2. ALL CONDUIT FOR ENVIRONMENTAL CONTROL SYSTEM SHALL BE 3/4". DO NOT COMBINE SENSOR AND 120 VOLT CONTROL (VERIFIED BY MECHANICAL CONTRACTOR).
3. ALL MECHANICAL EQUIPMENT SHALL BE FLEXED TO A TERMINATING JUNCTION BOX WITHIN REASONABLE WORKING DISTANCE OF EQUIPMENT.
4. CONDUITS FROM 6"x6"x36" TROUGH TO:
 - a. SMOKE DETECTORS (SERIES BETWEEN ALL SMOKE DETECTORS)
 - b. AHU MOTOR STARTER & AIR PRESSURE SWITCH
 - c. A/C SOLENOIDS AND OUTSIDE AIR DAMPER MOTOR
 - d. A/C CONDENSING UNIT ON ROOF. SEAL TITE 3'-0" MAXIMUM TO EQUIPMENT
 - e. PRODUCE PREP DAMPER MOTOR, SENSOR AND SOLENOID VALVES
 - f. HEAT RECLAIM SOLENOID VALVE
 - g. DUCT HEATER #1 (AHU #1)
 - h. DUCT HEATER #2 (AHU #2)
 - i. SALES FLOOR AND FRONT DOOR SENSORS
 - j. MAIN AHU DISCHARGE AIR SENSOR LOCATION
 - k. MECHANICAL ROOM & GROCERY STAGING SENSORS
 - l. RTU-1 & RTU-02

CONTROL WIRING NOTES


1. (---) INDICATES FIELD WIRING BY THE ELECTRICAL CONTRACTOR.
2. KUDINGS ARE PROVIDED AND MOUNTED BY OTHERS.
3. SENSORS ARE PROVIDED BY OTHERS AND WIRED BY THE ELECTRICAL CONTRACTOR.

LEGEND

- ◇ ELECTRICAL STUB-UP
- ◇ DROP FROM CEILING
- ◇ SENSOR. SEE NOTES NO. 8, 12
- ◇ EVAPORATOR COIL
- ◇ MAGNETIC SWITCH
- ◇ REFRIGERATION CIRCUIT NUMBER
- ◇ REFRIGERATION CIRCUIT BREAK
- ◇ EMS LOAD (VERIFY WITH SESCO REPRESENTATIVE, ARCHITECT AND CRESCENT REPORT FOR EXISTING LOADS)

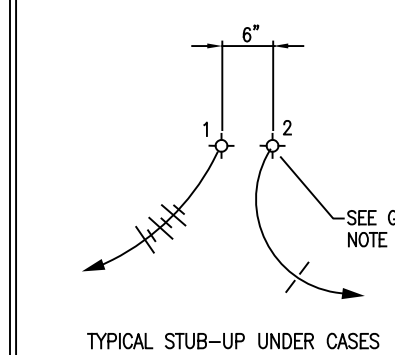

- (1) POWER STUB-UP
 - (2) DEFROST/TEMP SENSOR STUB-UP
- SEE 3/E1.03 FOR ADDITIONAL DETAIL.

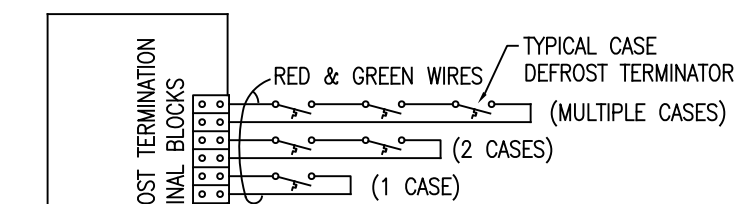


REFRIGERATION CONTROL JUNCTION BOX...TYP.

3 TYPICAL CASE CONTROL WIRING FOR HOT GAS CONTROL WIRE

REFRIGERATION PLAN KEY NOTES

1. NEW EVAP COIL TO REPLACE EXISTING. RECONNECT TO EXISTING CIRCUIT AS REQUIRED (COORDINATE EXISTING VOLTAGE AND AMPERAGE WITH EVAPORATOR PROVIDED AND MODIFY CIRCUIT AS REQUIRED).
2. EXTEND AND REUSE CIRCUITS MADE SPARE BY DEMOLITION OF EXISTING/RELOCATED REFRIGERATED CASES. VERIFY LIGHTING CIRCUITS (CONTROLLED BY EMS) ARE RECONNECTED TO LIGHTING LOADS AND ANTI-SWEAT CIRCUITS (CONTROLLED BY ANTI-SWEAT SYSTEM) ARE RECONNECTED TO ANTI-SWEAT LOADS. REUSE EXISTING UNDERSLAB STUBS WHERE POSSIBLE. REUSE EXISTING SENSOR CABLING WHERE POSSIBLE. SEE GENERAL NOTE #4. COORDINATE REQUIREMENTS WITH THE REFRIGERATION CONTRACTOR. RUN CONDUITS OVERHEAD AND DOWN IN WALL OR THROUGH FALSE COLUMN WITH REFRIGERATION PIPING WHERE EXISTING UNDERSLAB STUBS ARE NOT REUSED. FIELD VERIFY EXISTING CONDITIONS AND EXTENT OF WORK. CASES CIRCUITS ARE NOT ALLOWED TO SHARE NEUTRALS.
3. MOUNT RECEPTACLE FLUSH TO BASE OF REFRIGERATED CASE. COORDINATE REQUIREMENTS AND COUNDUIT ROUTING WITH CASE INSTALLATION.
4. WHERE TOTAL CASE LINEUP LOAD EXCEEDS 16AMPS (LIGHTING) OR 24AMPS (ANTI-SWEATS) SPLIT BETWEEN (2) CIRCUITS AS INDICATED. DOUBLE CASE LINEUP AS EVENLY AS POSSIBLE. IF EXISTING CASE LIGHTING CIRCUIT IS FED FROM A BREAKER LARGER THAN 20AMP OR ANTI-SWEATS CIRCUIT IS FED FROM A BREAKER LARGER THAN 30AMP, REPLACE THE EXISTING BREAKER WITH A NEW 20AMP (LIGHTING) OR 30AMP (ANTI-SWEAT) TRIP BREAKER OF SIMILAR TYPE AND AMP RATING. FIELD VERIFY EXISTING CONDITIONS AND EXTENT OF WORK.
5. CASE LIGHTING AND UPLIGHTING CIRCUITS TO BE CONTROLLED BY ENERGY MANAGEMENT SYSTEM (LOADS #6, #7 AND #14. SEE E6.03). PROVIDE CONTACTORS IN ENCLOSURE IF REQUIRED. FIELD VERIFY EXISTING.
6. CASE ANTI-SWEAT CIRCUITS TO BE CONTROLLED BY SWEAT-MISER SYSTEM. FIELD VERIFY EXISTING CONDITIONS. PROVIDE AND INSTALL ALL EQUIPMENT NECESSARY. COORDINATE REQUIREMENTS WITH THE REFRIGERATION CONTRACTOR.
7. ELECTRICAL CONTRACTOR TO VERIFY DEDICATED CIRCUIT ON TOP OF BACK-TO-BACK CASE LINE-UP FOR PLENUM FANS AND PROPERLY LABEL IN PANEL SCHEDULES. IF NO DEDICATED CIRCUIT IS PRESENT, ELECTRICAL CONTRACTOR TO PULL NEW 20A DEDICATED CIRCUIT TO CASE LINE-UP FOR FAN POWER. INSTALLED BY REFRIGERATION CONTRACTOR. WIRED BY ELECTRICAL CONTRACTOR.
8. ELECTRICAL CONTRACTOR TO CONNECT PRODUCE CASE FAN CIRCUIT TO CASE DOOR A/S CIRCUIT TO POWER DOOR ANTI-SWEAT CIRCUITS. FIELD VERIFY EXISTING CIRCUIT DO NOT OVERLOAD EXISTING CIRCUIT. COORDINATE REQUIREMENTS WITH THE REFRIGERATION CONTRACTOR.
9. CORRECT CASE REFRIGERATION LABELS IN PANEL SCHEDULES. RE-CIRCUIT CASES TO REFLECT CHANGES FROM REFRIGERATION CIRCUITS. ALL CASES ON SAME REFRIGERATION CIRCUIT SHALL BE FED FROM SAME ELECTRICAL CIRCUITS (DO NOT MIX REFRIGERATION CASES ACROSS ELECTRICAL CIRCUITS). MODIFY PANELS SCHEDULE TO REFLECT REFRIGERATION WORK.

1 ELECTRICAL REFRIGERATION PLAN
3/32" = 1'-0"

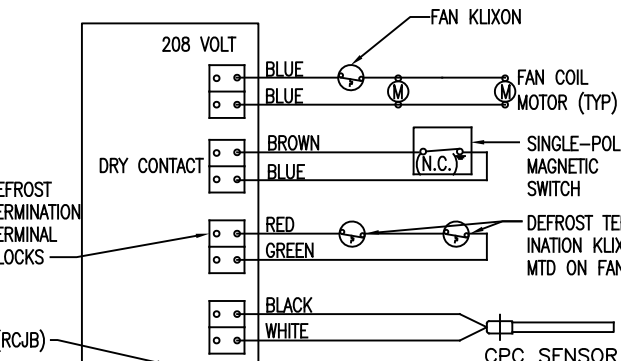

2 TYPICAL FREEZER WIRING
E1.03 NOT TO SCALE

REVISIONS


NO. DESCRIPTION

DATE

GENERAL NOTES:

1. MEDIUM TEMPERATURE CASES (PER CIRCUIT ELECTRICAL REQUIREMENTS AND COLOR CODES)
 - FANS: 12GA 1-BLACK, 1-WHITE, 1-BLACK/WHITE (NEUTRAL), RUN THROUGH EMS LOAD #6
 - LIGHTS: 12GA 1-RED, 1-WHITE, 1-RED/WHITE (NEUTRAL), RUN THROUGH EMS LOAD #6
 - ANTI-SWEAT HEATERS: 100A 1-BLUE, 1-WHITE, 1-BLUE/WHITE (NEUTRAL), RUN THROUGH THE SWEATMISER PANEL. CASES ONLY. RUN THROUGH THE SWEATMISER PANEL. ONE CIRCUIT FOR DAIRY, ONE CIRCUIT FOR LUNCH MEAT AND ONE CIRCUIT FOR BEER. MARK NEUTRAL (BLUE/WHITE WIRE) WITH PROPER PANEL LETTER AND CIRCUIT NUMBER. THERE WILL BE A 44A JUNCTION BOX INSTALLED ON TOP OF THE CASES BY THE RETIRED DOOR COMPANY THAT THE EC WILL RUN HIS WIRES TO. SEE ENVIRONMENTAL NOTES ON THIS SHEET.
 - 22GA 4-WIRE SHIELDED CABLE 1-BLACK AND 1-WHITE FOR CASE SENSOR, 1-RED AND 1-GREEN FOR SPARES.
2. LOW TEMPERATURE CASES (PER CIRCUIT ELECTRICAL REQUIREMENTS AND COLOR CODES)
 - FANS: 12GA 1-BLACK, 1-WHITE, 1-BLACK/WHITE (NEUTRAL)
 - LIGHTS: 12GA 1-RED, 1-WHITE, 1-RED/WHITE (NEUTRAL), RUN THROUGH EMS LOAD #6
 - ANTI-SWEAT HEATERS: 100A 1-BLUE, 1-WHITE, 1-BLUE/WHITE (NEUTRAL), RUN THROUGH THE SWEATMISER PANEL. MARK NEUTRAL (BLUE/WHITE WIRE) WITH PROPER PANEL LETTER AND CIRCUIT NUMBER.
 - 22GA 4-WIRE SHIELDED CABLE 1-BLACK AND 1-WHITE FOR CASE SENSOR, 1-RED AND 1-GREEN FOR DEFROST TERMINATION.
3. MEDIUM TEMPERATURE WALK-IN COOLERS (PER CIRCUIT ELECTRICAL REQUIREMENTS AND COLOR CODES)
 - FANS: 12GA 1-BLACK, 1-WHITE, 1-BLACK/WHITE (NEUTRAL)
 - LIGHTS: 12GA 1-RED, 1-WHITE, 1-RED/WHITE (NEUTRAL), RUN THROUGH EMS LOAD #1
 - 22GA 4-WIRE SHIELDED CABLE 1-BLACK AND 1-WHITE FOR CASE SENSOR, 1-RED AND 1-GREEN FOR SPARES.
4. LOW TEMPERATURE WALK-IN FREEZERS (PER CIRCUIT ELECTRICAL REQUIREMENTS AND COLOR CODES)
 - FANS: 12GA 2-BLUE (FAN POWER COMES FROM THE LOW-TEMP RACK EVAPORATOR CONTACTOR)
 - LIGHTS: 12GA 1-RED, 1-WHITE, 1-RED/WHITE (NEUTRAL), RUN THROUGH EMS LOAD #1
 - 22GA 4-WIRE SHIELDED CABLE 1-BLACK AND 1-WHITE FOR CASE SENSOR, 1-RED AND 1-GREEN FOR TERMINATION, 1-BROWN AND 1-BLUE FOR MAGNETIC DOOR SWITCH
5. ALL CONTROL WIRES FOR CASES AND WALK-INS SHALL TERMINATE AT THE ASSOCIATED REFRIGERATION RACK OR REMOTE MANIFOLD.
6. THE EC SHALL MOUNT THE DOOR SWITCH PROVIDED BY THE RACK MFG (IN RC PARTS). EC SHALL PROVIDE WIRE AND CONDUIT FROM FREEZER TO REFRIGERATION RACK. COORDINATE WITH THE FOOD LION REFRIGERATION REPRESENTATIVE.
7. ALL CONDUIT FOR REFRIGERATED CASES SHALL BE 1". ENTIRE SALES AREA STUB-UP TO 1" OF DIMENSION.
8. DIMENSIONS PULLED FROM INSIDE FACE OF MASONRY WALL UNLESS OTHERWISE INDICATED ON PLANS.
9. ALL WIRING SHALL BE DONE IN ACCORDANCE WITH N.E.C. STANDARDS AND WITH FOOD LION STANDARDS. INSTALL USING PROPER WORKMANSHIP. EC IS TO MAKE SURE THAT NO MC OR BX OR ANY OTHER FLEX CABLES ARE USED UNLESS OTHERWISE NOTED. MC OR BX CAN ONLY BE USED IN SHORT RUNS FOR LIGHTING FEEDS. EXT MUST BE USED TO CONNECT PANEL TO JUNCTION BOX AND HAVE COMPRESSION-TYPE FITTINGS. SEE SPECIFICATIONS FOR STANDARD PRACTICES.
10. RUN A SEPARATE 3/4" CONDUIT FROM EACH REFRIGERATION CONTROLLER TO ITS RESPECTIVE CONDENSER, CONTAINING (1) 4-WIRE SHIELDED CABLE FOR COMMUNICATION. ONLY SHIELDED CABLES SHALL BE RUN IN THIS CONDUIT.
11. ALL WIRE SHALL BE STRANDED FOR CONTROLS AND SOLID FOR BRANCH CIRCUITS.
12. ANTI-SWEAT SENSOR MOUNTED ON CHASE/COLUMN ABOVE FROZEN FOOD CASE LINE-UP BY ELECTRICAL CONTRACTOR. COORDINATE EXACT LOCATION WITH FOOD LION REPRESENTATIVE. SEE ENVIRONMENTAL CONTROL NOTES THIS SHEET.
13. PROVIDE SHIELDED CABLE LABELING AS REQUIRED FOR ALL REFRIGERATED CASES. THIS INCLUDES NEW, EXISTING, RELOCATED, AND EXISTING TO REMAIN CASES. COOLERS AND FREEZERS WILL BE INCLUDED IN THIS PROCESS IF NO TEMPERATURE SENSORS EXIST. SEE GENERAL NOTES #1-4. VERIFY EXTENT OF WORK IN FIELD. EACH REFRIGERATION CIRCUIT WILL HAVE ITS OWN ELECTRICAL CIRCUIT AS AN EXAMPLE, IF ONE REFRIGERATION CIRCUIT IS REMOVED AND IS REPLACED BY TWO REFRIGERATION CIRCUITS AN ADDITIONAL ELECTRICAL CIRCUIT WILL BE REQUIRED. THIS CIRCUIT WILL HAVE LIGHTS AND FANS SEPARATED AND ANTI-SWEAT RUN THROUGH THE ANTI-SWEAT CONTROLLER FOR ALL NEW AND RELOCATED GLASS DOOR FROZEN FOOD CASES.
14. INSTALL A 6" X 6" X 36" WIRING TROUGH WHERE THE CABLES ENTER THE MECHANICAL ROOM. CONDUIT FROM THE TROUGH TO THE RESPECTIVE RACK/HEADER, LABELING BOTH ENDS OF EACH CABLE WITH CIRCUIT DESIGNATION. REFRIGERATION CONTRACTOR SHALL BE RESPONSIBLE FOR TERMINATING THE SENSOR CABLES TO THE RACK/HEADER AND CASE/COOLERS. IMPORTANT NOTE: ELECTRICAL CONTRACTOR SHALL RUN SENSOR CABLES THE NIGHT OF THE CASE MOVES.
15. BIDDING ELECTRICAL CONTRACTORS SHALL BE RESPONSIBLE FOR OBTAINING A COPY OF THE REFRIGERATION INSTALLATION SCOPE OF WORK & SUMMARY TO VERIFY & INCLUDE ANY NEW OR RESIZED BREAKERS. NOTE: NEW LOW TEMP RACK PROVIDE EVAPORATOR POWER TO WALK-IN FREEZERS. INCLUDE RELOCATING EVAPORATOR CIRCUITS WHEN A NEW RACK IS INDICATED. WHEN NEW E2E CONTROLLERS ARE INDICATED IN THE REFRIGERATION SCOPE OF WORK, PROVIDE 3/4" CONDUIT FROM ENVIRONMENTAL CONTROL PANEL.
 - TO A T-11 BOX AT RECLAIM WATER HEATERS. INCLUDE 4 WIRE SHIELDED.
 - TO REFRIGERATION RACKS, DASH CHAIN BACK TO RACK, INCLUDE (2) 4 WIRE SHIELDED CABLE FOR COM B & C ON CONTROLLERS. IN NEW RACKS PROVIDE 3/4" CONDUIT FROM ANY NEW RACKS TO ROOFTOP CONDENSER (2) 14'S AND (4) WIRE SHIELDED.
16. ALL NEW AND RELOCATED CASE WORK REQUIRES A SEPARATE NEUTRAL FOR EACH: LIGHTS, FANS & ANTI-SWEAT HEATERS. NO DOUBLE POLE BREAKERS ARE ALLOWED FOR SHARED NEUTRALS.
17. ALL NEW AND EXISTING LOW VOLTAGE CABLING SHALL BE PROPERLY SUPPORTED AND NEATLY SECURED. ALL NEW CABLES SHALL BE IN CONDUIT VERTICALLY AND SECURED NEATLY TO STEEL OVERHEAD. ANY NEW CABLING TO BE RUN PARALLEL & PERPENDICULAR TO EXTERIOR WALLS. ALL ABANDONED CABLES TO BE REMOVED.
18. REFRIGERATION SENSOR WIRING MAY BE FREE WIRED AND TIE-WRAPPED TO THE STRUCTURE ABOVE LAY-IN CEILINGS AND IN EXPOSED CEILING BACK ROOM AREAS, IF ALLOWED BY CODE (UNLESS CALLED OUT TO BE UNDER SLAB). SENSOR WIRING IN EXPOSED STRUCTURE CEILINGS (REMODELS) SHALL BE RUN IN EMT CONDUIT. IN MACHINE ROOMS, SENSOR WIRING SHALL BE INSTALLED IN A 6" X 6" X 36" TROUGH WHERE THE CABLES ENTER THE ROOM IN EMT CONDUIT FROM THE TROUGH TO ABOVE THE RESPECTIVE RACK/HEADER, THEN IN FLEXIBLE CONDUIT TO THE RACK/HEADER, LABELING BOTH ENDS OF EACH CABLE WITH CIRCUIT DESIGNATION. REFRIGERATION CONTRACTOR TO TERMINATE THE SENSOR CABLES TO THE RACK/HEADER AND CASES/COOLERS.
19. REFRIGERATION CONTRACTOR SHALL SUPPLY AND INSTALL SOLENOID VALVE AT THE RACK FOR THE GARDEN COOLER & PRODUCE PREP EVAPORATOR COILS.
20. RELOCATE COLUMN MOUNTED SENSORS FOR ANTI-SWEATS WHEN FROZEN FOOD CASES ARE REPOSITIONED IN THE SALES AREA.
21. THE ELECTRICAL CONTRACTOR WILL REUSE EXISTING STUB-UPS FOR NEW CASES WHERE POSSIBLE. IN THE EVENT THERE'S NO EXISTING STUB UP HE WILL COORDINATE WITH THE FOOD LION CONSTRUCTION MANAGER RUNNING WIRE OVERHEAD. (REFER TO NOTES #1-4). FIELD VERIFY EXTENT OF WORK REQUIRED PRIOR TO BID.
22. THE ELECTRICAL CONTRACTOR TO PROPERLY SEAL ALL CONDUITS ENTERING WALK-IN COOLERS AND FREEZERS TO PREVENT MOISTURE. WHERE A CONDUIT PASSES THROUGH AN INSULATED PANEL AND INTO A REFRIGERATED SPACE, THAT CONDUIT INTERIOR AND PENETRATION SHALL BE SEALED TO PREVENT MOISTURE TRANSFER AND ACCUMULATION. ANY MOISTURE ACCUMULATION / CONDENSATION OR ICE PRESENT WITHIN A REFRIGERATION SPACE, CONDUIT BODY, ELECTRICAL BOX OR FIXTURES SHALL BE REMOVED WHILE ENTRY POINT IS PROPERLY REPAIRED / SEALED.
23. GENERAL CONTRACTOR SHALL PAINT ALL EXPOSED REFRIGERATION LINES IN MEAT PREP, GARDEN COOLER, AND PRODUCE PREP TO MATCH WALL COLOR.

Riddick Fiedler Stern
Architecture ■ Planning ■ Interior Design
261 West Bute Street ■ Norfolk, VA 23510 ■ (757) 627-2791

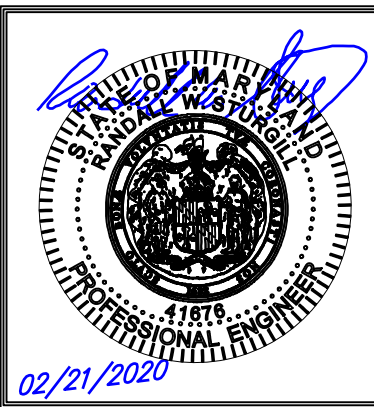

FOOD LION 2560
7514 North Point Rd
Sparrows Point, MD 21219

REFRIGERATION ELECTRICAL PLAN

DRAWING FILE NAME
2560 E1.03.00

RFS JOB #

2019-042

DATE

02/21/2020

E1.03

4 OF 14

STURGILL ENGINEERING P.A.
ONE SOUTH MAIN ST.
LEXINGTON, NC 27292
(336) 288-1249 PHL
(336) 236-6393 FAX