TYPICAL HANDICAP DETAILS

REFER TO PLANS AND ELEVATIONS FOR SPECIFIC HANDICAP LOCATIONS

ALL NEW/EXISTING/RELOCATED PLUMBING FIXTURES, GRAB BARS AND ACCESSORIES INTENDED FOR HANDICAP ACCESSIBLE USE SHALL BE INSTALLED/REINSTALLED PER CLEARANCES AND MOUNTING HEIGHTS INDICATED IN THESE TYPICAL HANDICAP DETAILS. ANY CLEARANCES OR MOUNTING HEIGHTS NOT SHOWN IN THE TYPICAL HANDICAP DETAILS SHALL BE INSTALLED/REINSTALLED PER THE RESTROOM ELEVATIONS SHOWN ON THIS SHEET.

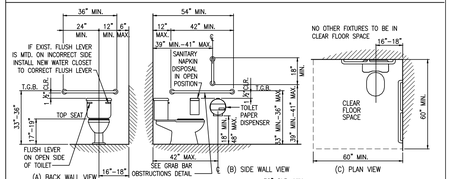

WATER CLOSET & GRAB BARS

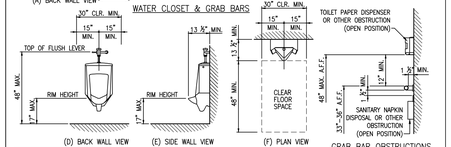

URINAL CLEARANCES

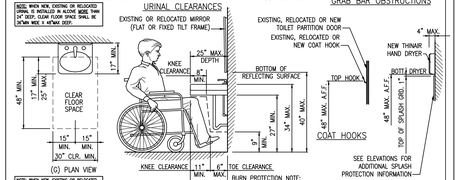

COAT HOOKS

GRAB BAR OBSTRUCTIONS

HAND DRYERS



LAVATORY CLEARANCES

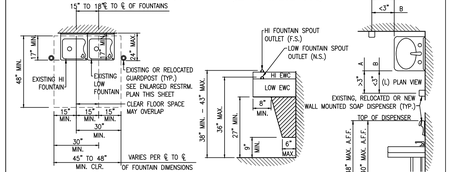

DRINKING FOUNTAIN CLEARANCES

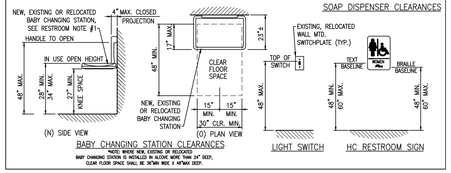

SOAP DISPENSER CLEARANCES

BABY CHANGING STATION CLEARANCES

NOTE: WHERE NEW, EXISTING OR RELOCATED BABY CHANGING STATION IS INSTALLED IN ALCOVE MORE THAN 24" DEEP, CLEAR FLOOR SPACE SHALL BE 36"MIN WIDE X 48"MAX DEEP.

RESTROOM NOTES

1. THE CHANGING TABLE SHALL BE MOUNTED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION MANUAL, ALL BUILDING CODES, REGULATIONS AND ORDINANCES RELATING TO CLEARANCE AND A.D.A. REGULATIONS.
2. CHANGING TABLE MANUFACTURED BY: SAFESTRAP COMPANY, INC. 105 WEST DEWEY AVENUE, BUILDING D SUITE 410, WHARTON, NJ 07885 CONTACT: TOLL FREE 1-800-356-7796 "DIAPER-DEPOT HORIZONTAL DIAPER CHANGING STATION" MODEL #2301, COLOR: POWDER GRAY, ~~MODEL #2300, COLOR; IVORY~~. PHONE (973) 442-4623
3. HAND DRYER ORDERING INFORMATION ORDER FROM: GEORGE SCOTT ASSOCIATES CONTACT: CURTIS SCOTT (704) 376-4775. ~~ORDER RECESSED KIT FOR MODIFICATION~~
4. MIRRORS BY: BOBRICK WASHROOM EQUIPMENT INC. – SEE SPECIFICATIONS
5. NEW TOILET FIXTURES & SINKS TO BE "WHITE" COLORED
6. EACH TOILET PARTITION DOOR SHALL RECEIVE 2 COAT HOOKS, ONE HOOK SHALL BE MOUNTED @ 47" A.F.F. AND THE OTHER @ 59"AFF
7. EACH TOILET PARTITION DOOR SHALL HAVE A PULL HANDLE MOUNTED ON BOTH SIDES OF THE DOOR @ 42" A.F.F.
8. CAULK FIXTURES IN RESTROOMS.
9. ANY WORK IN RESTROOMS TO BE SCHEDULED TO ALLOW FOR AT LEAST ONE OPEN AT ALL TIMES. COORDINATE WITH FOOD LION CONSTRUCTION SUPERVISOR.
10. REMOVE EXISTING SANITARY NAPKIN DISPENSER FROM WOMEN'S RESTROOM. REINSTALL AFTER NEW TILE WORK OR NEW PARTITIONS ARE INSTALLED.
11. TOILET PAPER DISPENSER TO BE MOUNTED 18" MIN TO 48" A.F.F. MAX AND 42" MAX. OFF BACK WALL TO CENTERLINE OF OUTLET OF DISPENSER.
12. EXISTING FIXTURES AND TOILET ACCESSORIES REMOVED FOR INSTALLATION OF NEW PORCELAIN WALL TILE OR NEW TOILET PARTITIONS ARE TO BE INSTALLED PER ADA COMPLIANCE.
13. GRAB BARS SHALL BE MOUNTED TO SUPPORT A FORCE OF 250 LBS. APPLIED @ ANY POINT IN ANY DIRECTION. PROVIDE AND INSTALL WOOD BLOCKING IN WALL @ NEW WALL OR USE BOBRICK "WING-IT" FASTENERS @ EXISTING TILE
12. PROVIDE LAVATORIES IN RESTROOMS WITH TRAP AND RISER INSULATION KIT.
13. PROVIDE R-11 BATT SOUND INSULATION IN WALLS AND ABOVE CEILING IN RESTROOMS WHEN WALLS ARE NEW, COORDINATE WITH PARTITION TYPES. INSTALL INSULATION ABOVE CEILING IN EXISTING CONDITIONS, IF NOT EXISTING.

TOILET ACCESSORY LEGEND

STATUS OF ACCESSORIES	TOILET ACCESSORY	
NEW	A	EXCEL – THIN AIR ELECTRIC HAND DRYER – SURFACE MOUNTED
NEW	B	BABY CHANGING TABLE, SEE NOTE #2
NEW	C	36" GRAB BAR
NEW	D	48" GRAB BAR
NEW	E	18"x30" MIRROR
–	F	~~18"x30" TILTED MIRROR~~
NEW	G	SOAP DISPENSER (BY ECOLAB)
NEW	H	TOILET PAPER DISPENSER – SCA MODEL # 66T, MOUNT BOTTOM AT +21" A.F.F.
NEW	J	SANITARY NAPKIN/TAMPON DISPOSAL – SCA BOBRICK B-254, MOUNT TOP AT +28" A.F.F.
NEW	K	FLOOR DRAIN
NEW	L	TOILET PARTITIONS, SEE NOTE #6 & #7
NEW	M	SCHLUTER QUADEC S.S. 1/4" SQUARE EDGE PROTECTION PROFILE
NEW	N	18" VERTICAL GRAB BAR
NEW	Q	EXCEL – STAINLESS WALL GUARD 16" X 32"

A* = * ASTERISK INDICATES EXISTING TOILET ACCESSORY TO BE RELOCATED. CONTRACTOR SHALL COORDINATE WITH FOOD LION CONSTRUCTION SUPERVISOR FOR REMOVAL AND REUSE OF EXISTING TOILET ACCESSORIES.

NOTE:
ALIGN WALL TILE JOINTS WITH FLOOR TILE JOINTS

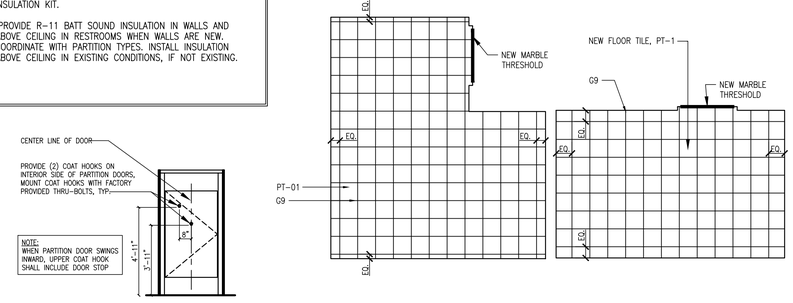

NOTE:
WHEN PARTITION DOOR SWINGS INWARD, UPPER COAT HOOK SHALL INCLUDE DOOR STOP

12 A4.03 COAT HOOK MOUNTING DETAIL
SCALE: 1/4" = 1'-0"

13 A4.03 PORCELAIN TILE DETAIL – FLOOR (RESTROOMS)
SCALE: 1/4" = 1'-0"

NOTE:
EXISTING WALL TILE AND FLOOR TILE IN RESTROOMS TO BE REMOVED, PREP SURFACES FOR NEW FINISHES

NOTE:
SEE PLAN DETAIL 2 &3 /A4.03 & ELEVATIONS FOR LOCATION OF RELOCATED ITEMS. COORDINATE W/ PLBG. & ELEC. DRWGS.

NOTE:
ALL NEW / RELOCATED / REINSTALLED FIXTURES & ACCESSORIES TO BE MOUNTED TO MEET ADA STANDARDS

NOTE:
ALL DIMENSIONS ARE FROM FINISH FACE OF TILE

NOTE: SEE DETAIL 7/A3.01 FOR NEW FURRING ON ALL EXISTING RESTROOM WALLS

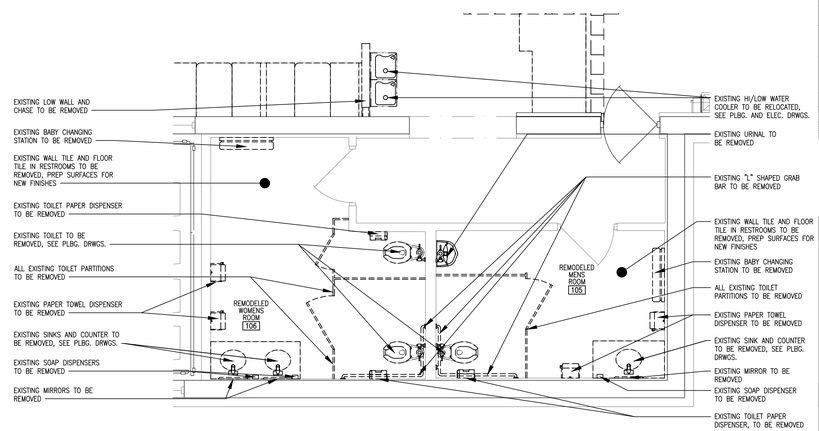

1 A4.03 REMODELED CUSTOMER RESTROOM DEMO PLAN
SCALE: 1/4" = 1'-0"

NOTE:
PORTION OF WALL TO BE REMOVED BY G.C. FOR NEW SINK DRAW LINE AND WATER PIPING. G.C. TO PATCH/REPAIR AFTER PLUMBING IS COMPLETE

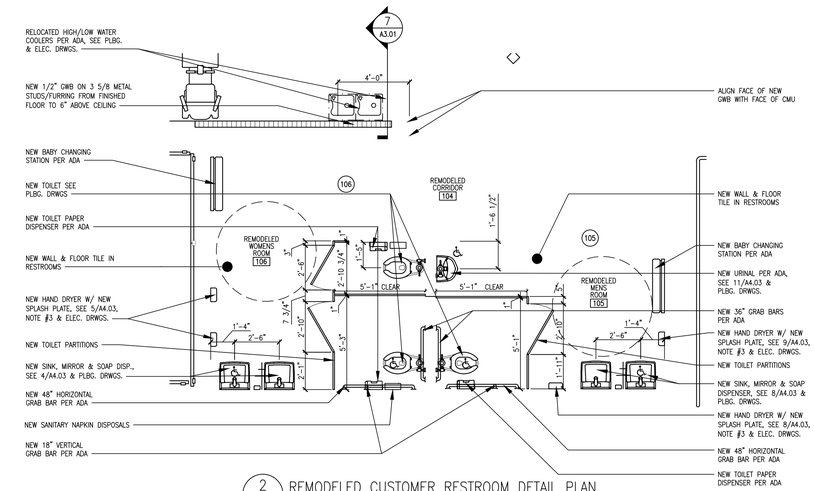

2 A4.03 REMODELED CUSTOMER RESTROOM DETAIL PLAN
SCALE: 1/4" = 1'-0"

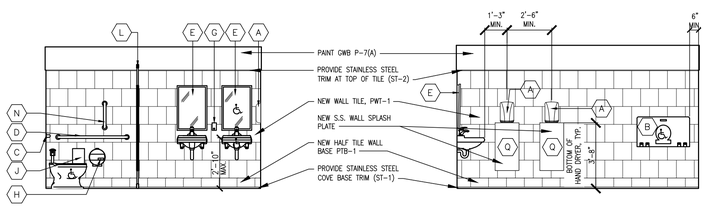

4 A4.03 CUSTOMER WOMEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

5 A4.03 CUSTOMER WOMEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

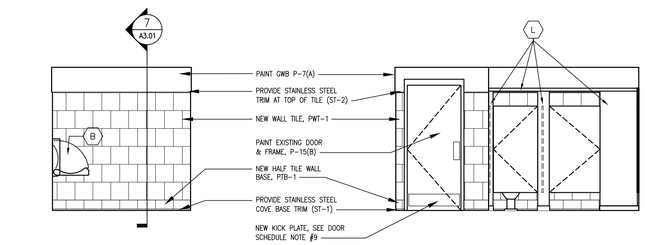

6 A4.03 CUSTOMER WOMEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

7 A4.03 CUSTOMER WOMEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

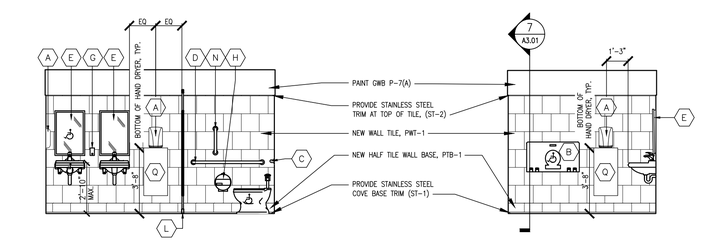

8 A4.03 CUSTOMER MEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

9 A4.03 CUSTOMER MEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

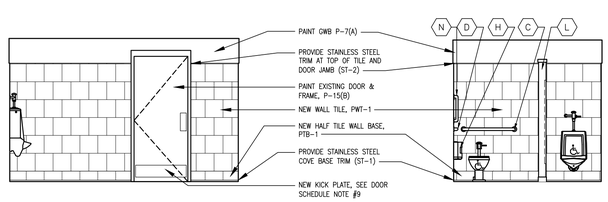

10 A4.03 CUSTOMER WOMEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

11 A4.03 CUSTOMER WOMEN'S RESTROOM ELEVATION
SCALE: 1/4" = 1'-0"

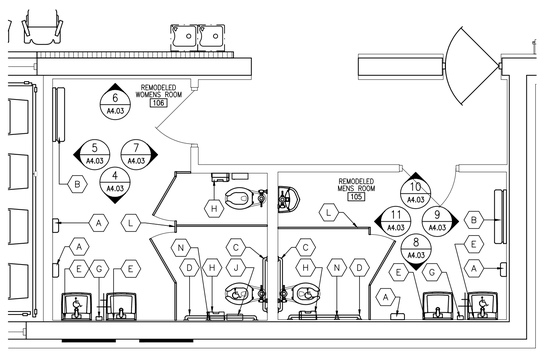

3 A4.03 REMODELED CUSTOMER RESTROOM ACCESSORIES PLAN
SCALE: 1/4" = 1'-0"

YCH ARCHITECTS
Architecture
Interior Design
Land Planning
Project Management

Professional Seals

Interior Alteration For:
FOOD LION
2110 Executive Drive, Salisbury, NC 28145/ PH: 704.633.8250
1555 E. UNION STREET
MORGANTON, NC 28655
Store No. 2250

OWNERSHIP OF INSTRUMENTS OF SERVICE:
All reports, specifications, plans, computer files, field data, notes, and other documents and instruments of service shall remain the property of the Design Professional. The Design Professional shall retain all common law, statutory and other reserved rights, including the copyright thereto.
This drawing is the property of Yates - Chreitzberg - Hughes Architects and is not to be reproduced or copied in whole or any part. It is not to be used on any other project and is to be returned upon request.
© Copyright 2019

Project No.: 2250FLTMHP20
File Name: 2250 A4.03_00.dwg
Date: 01-10-2020
Revisions:

ENLARGED RESTROOM PLANS & DETAILS

Architectural
A4.03
YCH Commission Number
19029.00

7035 Northwinds Dr NW
Concord, NC 28027
704 . 788 . 2000
ycharch.com

Monday, January 13, 2020 4:55:18 PM E:\2019\19029.00 Food Lion Store 2250 Morganton NC\1_Working\ArchiCad\2250 A4.03_00.dwg